



Hydraulic electromagnets

Technical brochure

Hydraulic electromagnets


Hydraulic electromagnets are the ideal equipment for handling ferrous materials from industrial demolition and are mainly used in demolition and recycling plants or in scrap yards. This attachment can be mounted on several machines and vehicles used in demolition sites, such as loaders and excavators, offering an advantage in terms of convenience and efficiency.

ATIB Magnetics range includes three types of hydraulic electromagnets: one with teeth, one with plate and one with chain.




ID

Hydraulic electromagnets with teeth are mainly used in demolition sites. The teeth are designed to rake debris, making it easier to extract ferrous materials. The teeth are also equipped with a quick fitting device and are easy to replace in case of wear. These electromagnets are equipped with a plate for quick hitch, providing the advantage that they can be attached without manual intervention. They are typically used with excavators and heavy machinery due to their high weight.

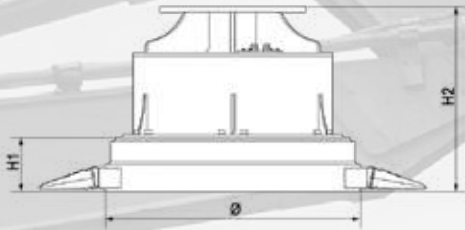


IP



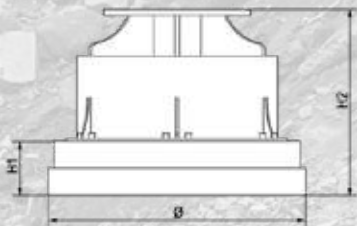






Hydraulic electromagnets with a plate for quick coupling can be attached without operator's manual intervention and have a more precise positioning on the material, making them extremely efficient. In addition, the plate can be modified/customised according to customer's needs, in order to fit the used machinery. They are typically attached to excavators.

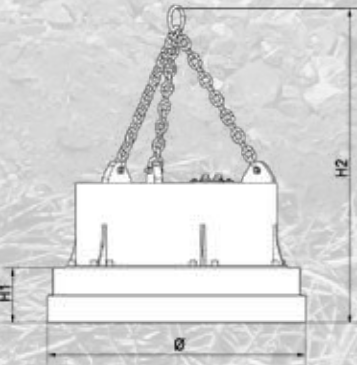



















IC

Hydraulic electromagnets with chain are ideal for scrap cleaning and handling and are mainly used in recycling sites and scrap yards. Generally attached to loaders, they can also be used with excavators and offer the best capacity/weight ratio.



MODELS	75IC	75IP	75ID	85IC	85IP	85ID	96IC	96IP	96ID
 Machine weight (Ton) min-max	7-15	8-15	8-15	9-16	10-16	10-16	12-20	13-20	14-20
 Min. Flow (L/min)	50	50	50	50	50	50	50	50	50
 Max. Flow (L/min)	150	150	150	150	150	150	150	150	150
 Max. Pressure (Bar)	200	200	200	200	200	200	200	200	200
 Diameter (mm)	750	750	750	850	850	850	960	960	960
 H base (mm)	245	245	245	245	245	245	260	260	260
 H including chain/plate (mm)	1100	860	860	1100	860	860	1200	860	860
KW Power (kW)	2,6	2,6	2,6	3,4	3,4	3,4	4,5	4,5	4,5
 Weight (Kg)	600	680	730	740	820	880	840	940	1030
 Voltage (V)	220	220	220	220	220	220	220	220	220

MODELS	105IC	105IP	105ID	114IC	114IP	114ID	126IC	126IP	126ID
 Machine weight (Ton) min-max	16-25	17-25	17-25	18-27	20-28	20-28	22-32	24-35	24-35
 Min. Flow (L/min)	60	60	60	60	60	60	60	60	60
 Max. Flow (L/min)	150	150	150	150	150	150	150	150	150
 Max. Pressure (Bar)	200	200	200	200	200	200	200	200	200
 Diameter (mm)	1050	1050	1050	1140	1140	1140	1260	1260	1260
 H base (mm)	270	270	270	270	270	270	270	270	270
 H including chain/plate (mm)	1350	840	840	1350	840	840	1400	840	840
KW Power (kW)	5,5	5,5	5,5	6,0	6,0	6,0	7,5	7,5	7,5
 Weight (Kg)	1200	1300	1450	1300	1400	1550	1600	1700	1850
 Voltage (V)	220	220	220	220	220	220	220	220	220

MODELS	138IC	138IP	138ID	150IC	150IP	150ID
 Machine weight (Ton) min-max	32-42	32-42	32-42	33-42	35-45	35-45
 Min. Flow (L/min)	100	100	100	100	100	100
 Max. Flow (L/min)	150	150	150	150	150	150
 Max. Pressure (Bar)	200	200	200	200	200	200
 Diameter (mm)	1380	1380	1380	1500	1500	1500
 H base (mm)	300	300	300	300	300	300
 H including chain/plate (mm)	1450	840	840	1450	870	870
KW Power (kW)	10	10	10	12	12	12
 Weight (Kg)	2100	2200	2400	2450	2650	2900
 Voltage (V)	220	200	220	220	220	220



ATiB MAGNETICS

Via Industriale, 29
Barbariga 25030 (BS) Italy
Tel: +39 030 9772170
sales@atibmagnetics.com



www.atibmagnetics.com